

## Interactive Flat Panel H10S Pro


Chipset: MT9679



### Product Description

#### EDLA Certified!

Google Application Ecology  
Compatibility Stability (Optional)

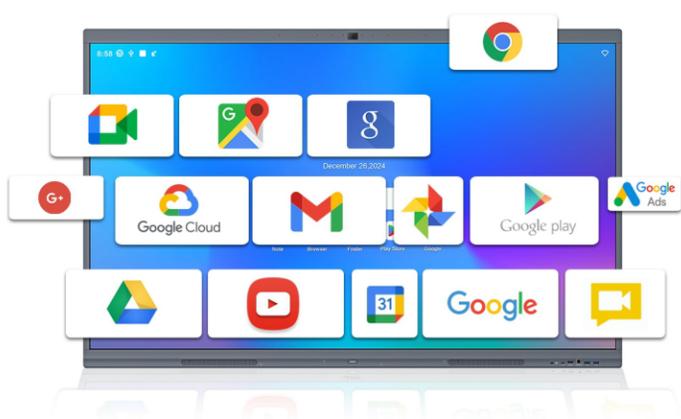

**A73×4**

Cortex Processor



**MT9679**

Chipset

**48MP**

Camera

**Android 14**

System

**8G+128G**

Storage

#### Specification

- Support Google EDLA Certified
- 4K HD large screen
- AG Anti-Glare
- Titanium Gray Aluminum Alloy Frame
- Smart whiteboard touch writing
- Remote meeting
- Wireless transmission
- Full-size series
- Powerful performance and integrated Android 14

### Product Specifications

Model	55 inch	65 inch	75 inch	86 inch
<b>Display Parameters</b>				
Display Area	1209.6×680.4	1428.48×803.52	1650.24×928.26	1895.04×1065.96
Aspect	16:9			
Resolution	3840×2160 Pixels			
Backlight	D-LED			
Response Time	6.5ms			
Refreshing Frequency	60Hz			
Display Color	1.07G(8bit+FRC)			
Brightness	400cd/m <sup>2</sup>			
Contrast Ratio	Based on the OC			
Viewing Angle	178(H/V)			
<b>Touch Parameters</b>				
Sensing Type	Infrared recognition			
System	Windows 10/Windows 8/Windows 7/Windows XP Android/Linux/MacOSX/Chrome			
Touch point	Up to 40 points touch			
Writing height	1.5mm			
Response Time	≤10ms			
Touch Tool	Finger, Passive infrared pen, Active infrared pen			
Accuracy	±1mm(over 90%Area)			
Surface Hardness	Toughened Glass with Level 7 of Mohs Standard			
Output Coordinate	32768×32768			
<b>Camera</b>				
Camera	48MP 1080P HD Camera			
Microphone	8 Array Microphone			
<b>System Parameters</b>				
System Version	Android 14			
Chipset	MT9679			
CPU	Cortex-A73×4			
GPU	Mali G52 Mc1			
RAM/ROM	8GB/128GB			
<b>I/O interfaces</b>				
Front	TYPE-C:1	HDMI IN:1	TOUCH:1	USB3.0:2
Bottom	USB 3.0:1	USB 2.0:1	TOUCH:1	HDMI:2
Rear	RS232:1	RJ 45:1	AUDIO OUT:1	AUDIO IN:1 SPDIF:1
<b>General Parameters</b>				
Power Supply	100-240V~, 50/60Hz, 3.0A max			
Overall Power	96.5W	122W	214W	230W
Standby Power	≤0.5W			
Speaker Type	2.0 Sound channel			
Output Power	2×16W			
<b>Accessories</b>				
Accessories list (Optional)	 OPS	 Wireless transmitter	 Mobile Stand	

### Packing information

Size	Display size (inch/mm)	Overall size / N.W. L × H × W(mm)/kg	Overall size / G.W. L × W × H(mm)/kg	QTY of containers(pcs) 20'GP/40'GP/40'HQ
55"	1209.6×680.4	1269.6×791.4×98.2 / 25.4	1375×187×890 / 32.57	102/200/315
65"	1428.48×803.52	1488.4×915.3×97.1 / 29.3	1628×185×1027 / 39.45	82/174/174
75"	1650.24×928.26	1709.4×1038.9×97.3 / 41.1	1863×185×1162 / 56.26	74/154/154
86"	1895.04×1065.96	1957×1179×97 / 51.6	2110×185×1302 / 68.69	33/33/140